


VERTIFLO PUMP COMPANY Performance Curves


Series 1300 / Model 1312 Size 1 1/2 X 1 X 6

1750 RPM

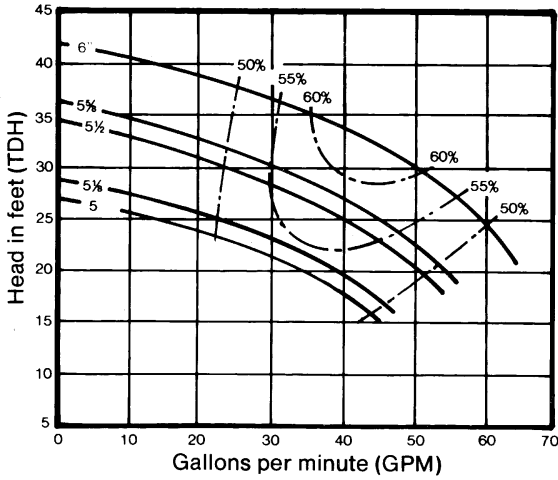

HP	SF	DIA
3/4	1.15	6
	1.00	6
1/2	1.15	5 5/8
	1.00	5 1/2
1/3	1.15	5 1/8
	1.00	5


3500 RPM

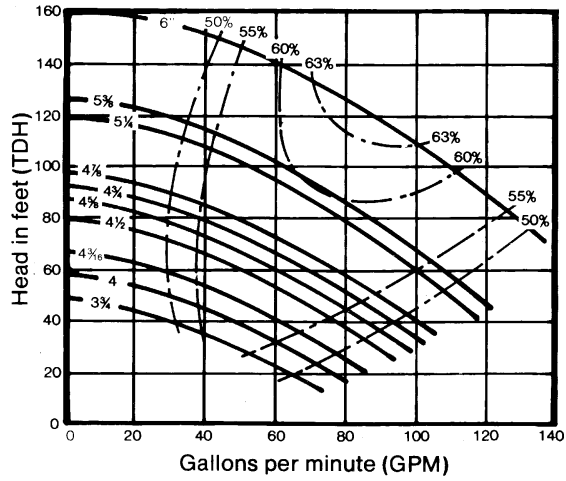

HP	SF	DIA	HP	SF	DIA
5	1.15	6	1 1/2	1.15	4 5/8
	1.00	6		1.00	4 1/2
3	1.15	5 3/8	1	1.15	4 3/16
	1.00	5 1/4		1.00	4
2	1.15	4 7/8			
	1.00	4 3/4			


Series 1300 / Model 1312 Size 2 X 1 1/2 X 6

1750 RPM

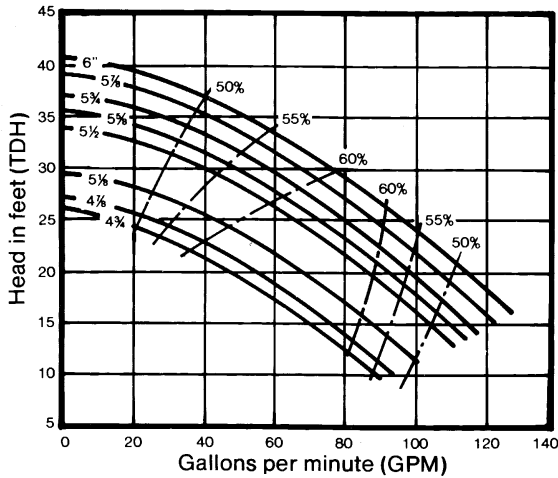

HP	SF	DIA	HP	SF	DIA
1 1/2	1.15	6	3/4	1.15	5 5/8
	1.00	6		1.00	5 1/2
1	1.15	5 7/8	1/2	1.15	5 1/8
	1.00	4 7/8		1.00	4 7/8

3500 RPM

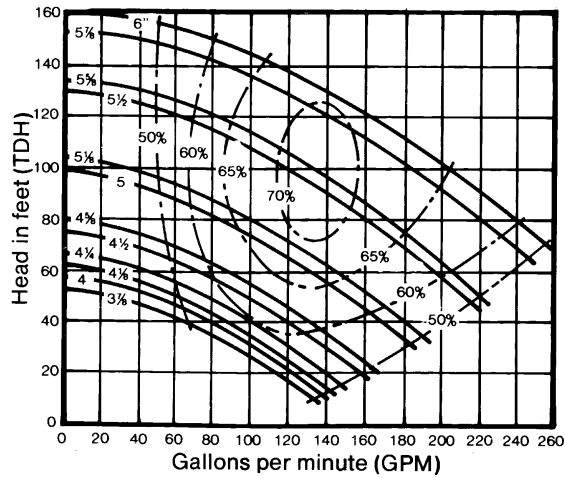

HP	SF	DIA	HP	SF	DIA
7 1/2	1.15	6	2	1.15	4 5/8
	1.00	5 7/8		1.00	4 1/2
5	1.15	5 5/8	1 1/2	1.15	4 1/4
	1.00	5 1/2		1.00	4 1/8
3	1.15	5 1/8	1	1.15	4
	1.00	5		1.00	3 7/8

Performance at Casing Discharge Flange

Curves Show Performance with Liquid Having Specific Gravity 1.0 Viscosity • 30 SSU

CUSTOMER _____ CUSTOMER NO. _____

PROJECT _____

ENGINEER _____

CONTRACTOR _____

CONDITIONS: _____ GPM _____ TDH _____ HP _____ EFF% _____ IMP. DIA _____

1300